

# MEMBRAPOR SPECIFICATION SHEET

## CH2O/M-50

Formaldehyde Gas Sensor in Mini Housing



### MEASUREMENT

Operation Principle	3-Electrode Electrochemical
Nominal Range	0 – 50 ppm
Maximum Overload	100 ppm
Inboard Filter	none
Output Signal	1000 ± 300 nA/ppm
Resolution (Electronics dependent)	< 0.5 ppm
T60 Response Time	< 40 sec
Typical Baseline Range (pure air, 20°C)	-0.5 ppm to 0.5 ppm
Maximum Zero Shift (+20°C to +40°C)	1.5 ppm
Repeatability	< 2 % of signal
Output Linearity	Linear
Gain	–

### ELECTRICAL

Rec. Load Resistor	10 Ohm
Bias Voltage	not recommended
Conformity to RoHS directive	RoHS Compliance

### ENVIRONMENTAL

Relative Humidity Range	15 % to 90 % R.H. non-condensing
Temperature Range	-20 °C to 50 °C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	N.D.
Humidity Effect	Abrupt changes in humidity cause a short-term signal


### LIFETIME

Expected Operation Life	2 years in air
Expected Long Term Output Drift in air	< 2 % per month
Filter Life	–
Storage Life	6 months in container
Rec. Storage Temperature	5 °C – 20 °C
Warranty Period	12 months from date of dispatch


Performance data conditions: 20 °C, 50% RH, 1013 mbar

### Miniature-Size Outline Dimensions

BOTTOM VIEW



SIDE VIEW

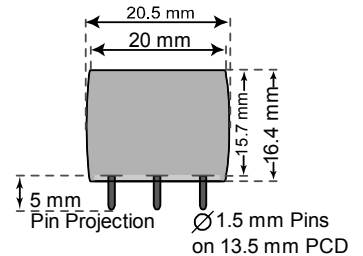

± 0.10 mm

### MECHANICAL

Weight	5.5 g
Position Sensitivity	None

### APPLICATIONS

Continuous Air Quality Monitoring  
Safety and Environmental Control  
For Portable Devices

### CROSS-SENSITIVITY DATA

The table below does not claim to be complete.

Interfering Gas	Cross-Sens. %
H <sub>2</sub>	1 % - 3 %
CO	10 % - 18 %
Organic solvents	

REV.: 12/2016

Page 1 of 1

Phone: +41 43 311 72 00  
Fax : +41 43 311 72 01  
Email: info@memrapor.ch  
www.memrapor.ch

MEMBRAPOR AG  
Birkenweg 2  
CH-8304 Wallisellen  
Switzerland

The data contained in this document is for guidance only. Memrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.